

SDV1151-A: COMPACT, 100Wrms SUB-WOOFER SPEAKER

FEATURES

- **SIMPLE TO INSTALL – FLOOR, WALL OR CEILING MOUNTING**
- **PROVEN DESIGN**
- **USES A PROPRIETARY 8" BASS DRIVER.**
- **DISCRETE**
- **HIGH QUALITY BASS REPRODUCTION**
- **AVAILABLE IN BLACK or WHITE¹**
- **EASY AND RELIABLE CONNECTIONS VIA "SPEAKON" CONNECTOR**
- **ROBUST CONSTRUCTION.**
- **COMPACT FOOTPRINT**
- **COMPATIBLE WITH SDV1095-6 AMPLIFIER UNIT**
- **CAN BE COMBINED DIRECTLY WITH WALL OR OTHER CEILING MOUNTED SPEAKERS IN THE ECOTEC SYSTEMS RANGE²**
- **LOW COST**

NOTES

- 1) Other colours available to special order.
- 2) See

SDV1100-A	Ceiling speaker
SDV1101-A	Wall speaker
SDV1102-A	Channel speaker



APPLICATIONS

- **RETAIL BACKGROUND MUSIC SYSTEMS**
- **BACKGROUND MUSIC SYSTEMS FOR LEISURE CLUBS**
- **BACKGROUND MUSIC SYSTEMS FOR RESTAURANTS AND BARS.**
- **MUSIC SYSTEMS FOR NIGHT CLUBS**
- **HOME CINEMA SYSTEMS**

DESCRIPTION

The SDV1151-A is a compact sub-woofer designed for free-standing, wall or concealed ceiling mounting applications. The speaker is a more powerful upgrade to the SDV1111-A ceiling mounting sub-woofer. Connection to the sub-woofer is via a Neutrik "Speakon" latching connector

The SDV1151-A sub-woofer can be driven by the EcoTec Systems class D amplifier unit, SDV1095-6-A. In addition to the sub-woofer, this amplifier can drive 2, 4 or 6 combinations of the SDV1100-A ceiling mounted speakers; the Bowman range of wall speakers (SDV1101-A); and the SDV1102-A ceiling channel speakers. For full details about the possible permutations of the EcoTec Systems speaker range, please contact EcoTec Systems or their authorised representative.

SPECIFICATIONS




Characteristics at a free air temperature of 25°C

PARAMETER	NOTES/TEST CONDITIONS	VALUE			UNIT
		MIN	TYP	MAX	
P	POWER HANDLING			100	W _{rms}
W	WEIGHT		11		Kg
Ø, H	DIMENSIONS	Width , height and depth			mm
R	IMPEDANCE	Measured at 100Hz			Ω
Fr	FREQUENCY RESPONSE	55		200	Hz
SPL	SENSITIVITY	Measured at 1m from speaker, with 1W input signal			dB
P _{out}	MAXIMUM OUTPUT LEVEL	CONTINUOUS PEAK			dB dB
				108 112	

DIMENSIONS

All Dimensions in millimetres

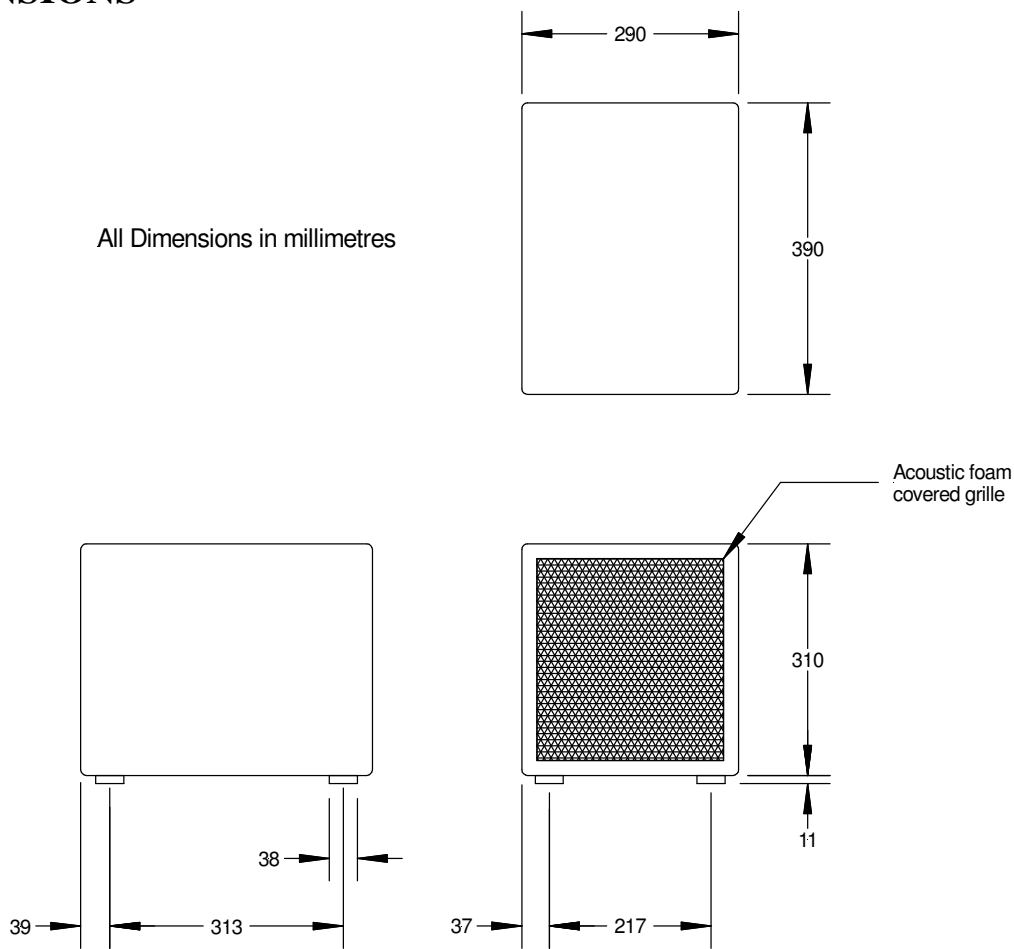

EcoTec Systems Ltd. reserve the right to change the products shown on this datasheet in the interest of improved specification. No responsibility is assumed for the use of information contained herein, nor for any infringement of patent or rights of others that may result from such use. No license is granted by implication or otherwise under any patent or patent right of EcoTec Systems Ltd.